
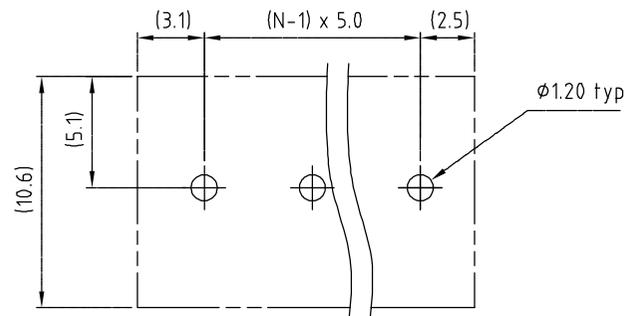
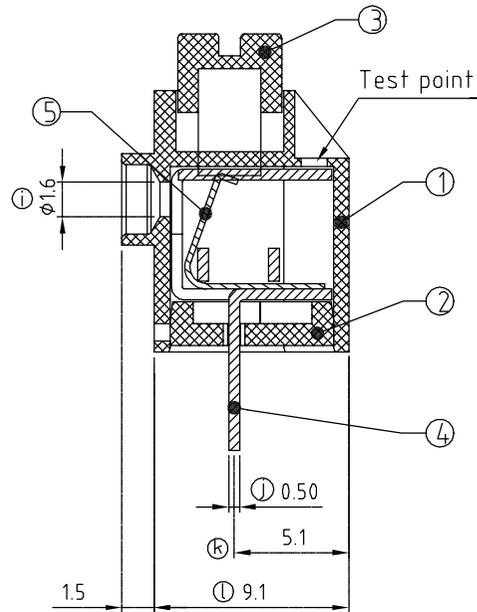


Dimension

Dim.A	Nx5.0
Dim.B	(N-1)x5.0

N=Number of poles

Poles	Tol
2p-8p	±0.20
9p-16p	±0.30
17p-24p	±0.40

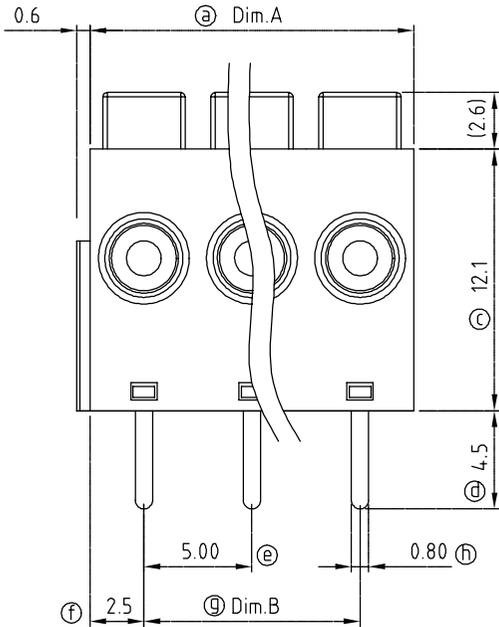

P.C.B. LAYOUT

SIGN	DATE	DESCRIPTION	APPROVER
△	10/6'06	Added cULus standard	Steady
△	2/26'07	The Soldering temperature from 245° to 250°	Aaron
△	4/18'11	Operating temperature is changed	Chen Bo

*THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!*

Material

- Item 1 Insulating body Thermoplastic ( UL94V-0 )
- Item 2 Insulating cover Thermoplastic ( UL94V-0 )
- Item 3 Insulating lever Thermoplastic ( UL94V-0 )
- Item 4 Contact pin Brass, Tin plated
- Item 5 Spring clamp Stainless steel

△ Electrical cULus

- Voltage rating: 300VAC
- Current rating: 7A
- Wire range:
- Solid wire(AWG): 18-22
- Stranded wire(AWG):
- Wire strip length: 7-7.5mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval:

PART NO.

**HY xx 00 x 0 xxxx G**

<p>NO of Poles</p> <p>02 2Contacts</p> <p>03 3Contacts</p> <p>..</p> <p>24 24Contacts</p>	<p>Color</p> <p>0 Black</p> <p>5 Green</p> <p>6 Blue</p> <p>8 Grey</p>	<p>RoHS</p> <p>Pb&lt;40,000ppm</p> <p>0000 Standard @ Logo</p> <p>000A Standard ANY Logo</p> <p>Any special item by customer request, please contact sales department.</p>
---	--	--

<h1>ANYTEK</h1>		<h2>CUSTOMER COPY</h2>	
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD			
TITLE	HY 5.0mm Series		
PART NO.	HYxx00x0xxxxG	DWG NO.	8HY0001
APPROVED	CHECKED	DESIGNED	DRAWN
			Chen Bo 2011.04.18
SHEET: 01/01		UNIT: mm	Tolerance
SCALE: NONE		X.     ±0.50	X.X   ±0.30
REV.: F		X.XX   ±0.10	X°     ±1°