

PQ033ES1MWP/PQ050ES1MWP

Low Output Current, Compact Surface Mount Type Low Power-Loss Voltage Regulators

■ Features


- Compact package: TO-92 type
(Size (mold part): 5.2×5.5×4.2 mm)
- Small current output: MAX. 150mA
- Low dissipation current:
Quiescent current I_q =MAX. 350μA
- Low power-loss:
Dropout voltage: MAX. 0.26 V at I_o =60 mA
Dropout voltage: MAX. 0.4 V at I_o =150 mA
- Built-in overcurrent, overheat protection functions
- Taped package

■ Applications

- TV, VCR
- Air conditioners
- DVD players
- Audio equipment

■ Outline Dimensions

(Unit : mm)

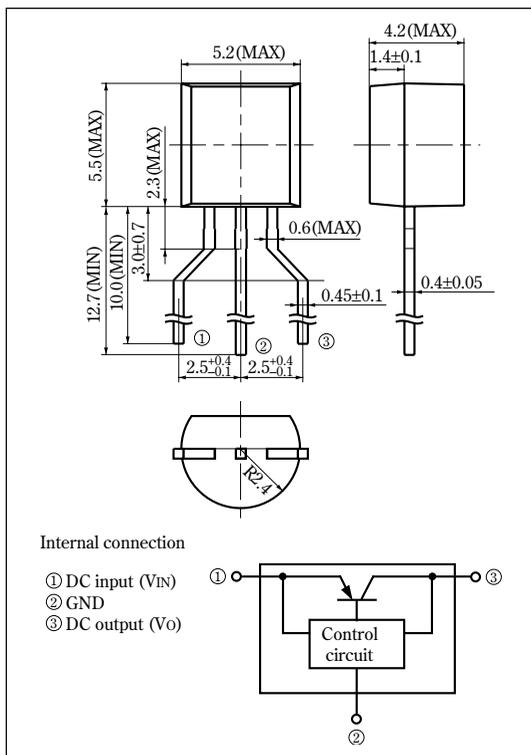

■ Absolute Maximum Ratings

($T_a=25^{\circ}\text{C}$)

Parameter	Symbol	Rating	Unit
*1 Input voltage	V_{IN}	16	V
Output current	I_o	150	mA
*2 Power dissipation	P_D	520	mW
*3 Junction temperature	T_j	150	$^{\circ}\text{C}$
Operating temperature	T_{opr}	-30 to +80	$^{\circ}\text{C}$
Storage temperature	T_{stg}	-55 to +150	$^{\circ}\text{C}$
Soldering temperature	T_{sol}	260 (For 10s)	$^{\circ}\text{C}$

*1 All are open except GND and applicable terminals.

*2 No heat sink

*3 Overheat protection may operate at $125 \leq T_j \leq 150^{\circ}\text{C}$.

•Please refer to the chapter " Handling Precautions ".

SHARP

Notice In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.
Internet Internet address for Electronic Components Group <http://sharp-world.com/ecg/>

■ Electrical Characteristics

(Unless otherwise specified, $V_{IN}=V_O(TYP.)+1.0V$, $I_O=30mA$, $T_a=25^\circ C$)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Output voltage	V_O	–	Refer to the table below.			V
Load regulation	R_{egL1}	$I_O=5mA$ to 60mA	–	10	50	mV
	R_{egL2}	$I_O=5mA$ to 100mA	–	20	100	mV
	R_{egL3}	$I_O=5mA$ to 150mA	–	30	160	mV
Line regulation	R_{egI}	$V_{IN}=V_O(TYP.)+1V$ to $V_O(TYP.)+6V$	–	3.0	20	mV
Temperature coefficient of output voltage	T_cV_O	$I_O=10mA$, $T_j=25$ to $75^\circ C$	–	0.05	–	mV/ $^\circ C$
Ripple rejection	RR	–	–	55	–	dB
Dropout voltage	V_{I-O}	$I_O=60mA$, $V_{IN}=\#4$	–	0.11	0.26	V
	V_{I-O}	$I_O=150mA$, $V_{IN}=\#4$	–	0.2	0.4	V
Quiescent current	I_q	$I_O=0mA$	–	170	350	μA

#4 Dropout voltage when output voltage lowers 0.1V from the voltage at $V_{IN}=V_O+1V$.

■ Output Voltage Line-up

($V_{IN}=V_O(TYP.)+1.0V$, $I_O=30mA$, $T_a=25^\circ C$)

	Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Output voltage	PQ033ES1MWP	V_O	–	3.234	3.3	3.366	V
	PQ050ES1MWP			4.900	5.0	5.100	

NOTICE

- The circuit application examples in this publication are provided to explain representative applications of SHARP devices and are not intended to guarantee any circuit design or license any intellectual property rights. SHARP takes no responsibility for any problems related to any intellectual property right of a third party resulting from the use of SHARP's devices.
- Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. SHARP reserves the right to make changes in the specifications, characteristics, data, materials, structure, and other contents described herein at any time without notice in order to improve design or reliability. Manufacturing locations are also subject to change without notice.
- Observe the following points when using any devices in this publication. SHARP takes no responsibility for damage caused by improper use of the devices which does not meet the conditions and absolute maximum ratings to be used specified in the relevant specification sheet nor meet the following conditions:
 - (i) The devices in this publication are designed for use in general electronic equipment designs such as:
 - Personal computers
 - Office automation equipment
 - Telecommunication equipment [terminal]
 - Test and measurement equipment
 - Industrial control
 - Audio visual equipment
 - Consumer electronics
 - (ii) Measures such as fail-safe function and redundant design should be taken to ensure reliability and safety when SHARP devices are used for or in connection with equipment that requires higher reliability such as:
 - Transportation control and safety equipment (i.e., aircraft, trains, automobiles, etc.)
 - Traffic signals
 - Gas leakage sensor breakers
 - Alarm equipment
 - Various safety devices, etc.
 - (iii) SHARP devices shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as:
 - Space applications
 - Telecommunication equipment [trunk lines]
 - Nuclear power control equipment
 - Medical and other life support equipment (e.g., scuba).
- Contact a SHARP representative in advance when intending to use SHARP devices for any "specific" applications other than those recommended by SHARP or when it is unclear which category mentioned above controls the intended use.
- If the SHARP devices listed in this publication fall within the scope of strategic products described in the Foreign Exchange and Foreign Trade Control Law of Japan, it is necessary to obtain approval to export such SHARP devices.
- This publication is the proprietary product of SHARP and is copyrighted, with all rights reserved. Under the copyright laws, no part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of SHARP. Express written permission is also required before any use of this publication may be made by a third party.
- Contact and consult with a SHARP representative if there are any questions about the contents of this publication.