
Т	HIS COPY IS PROVIDED ON A	RESTRICTED BASIS AND IS NOT TO BE U	SED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.
	Material	High Conductivity Seamless Copper Tube	Tongue also Stamped with:

Material	High Conductivity Seamless Copper Tube		
Plating	Electro-Tin		
Wire Size	1 AWG		
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric		
Wire Strip Length	11/16 in.		
Stud Size	3/8 in.		
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.		
UL Temperature Rating	90°C		
C.S.A Certified Wire Connector	Yes		
Panduit Color Code on Barrel	GREEN		
Panduit Die Index No. on Barrel	P37		
Alternate Industry Die Index No. () on Barrel	(11)		



1.49 REF



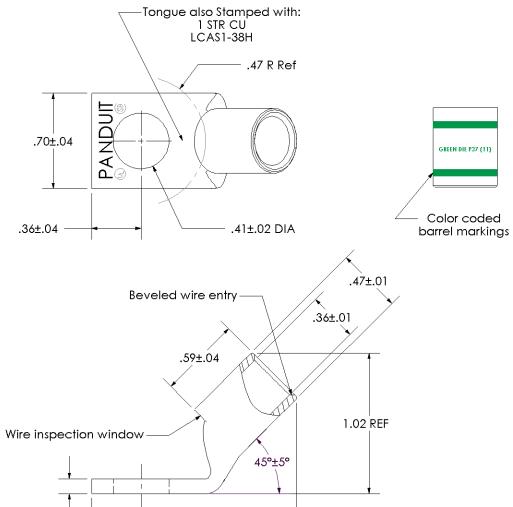

CERTIFIED LISTED

Wire Connector

						CORP. TINLEY PARK, ILLINOIS
0.1	4.00	DIAC	DIAGO		10700	LCAS1-38H-E Copper Lug - One-Hole, Short Barrel, 45° Angle Tongue
UI	4-03	PW2	PWS	REMOVED PANDUIT FROM BARREL MARKINGS	10790	
REV	DATE	BY	СНК	DESCRIPTION	ECN	SCALE DRAWING NO / CAD FILE LCAS1-38H-CUST

.11±.01