

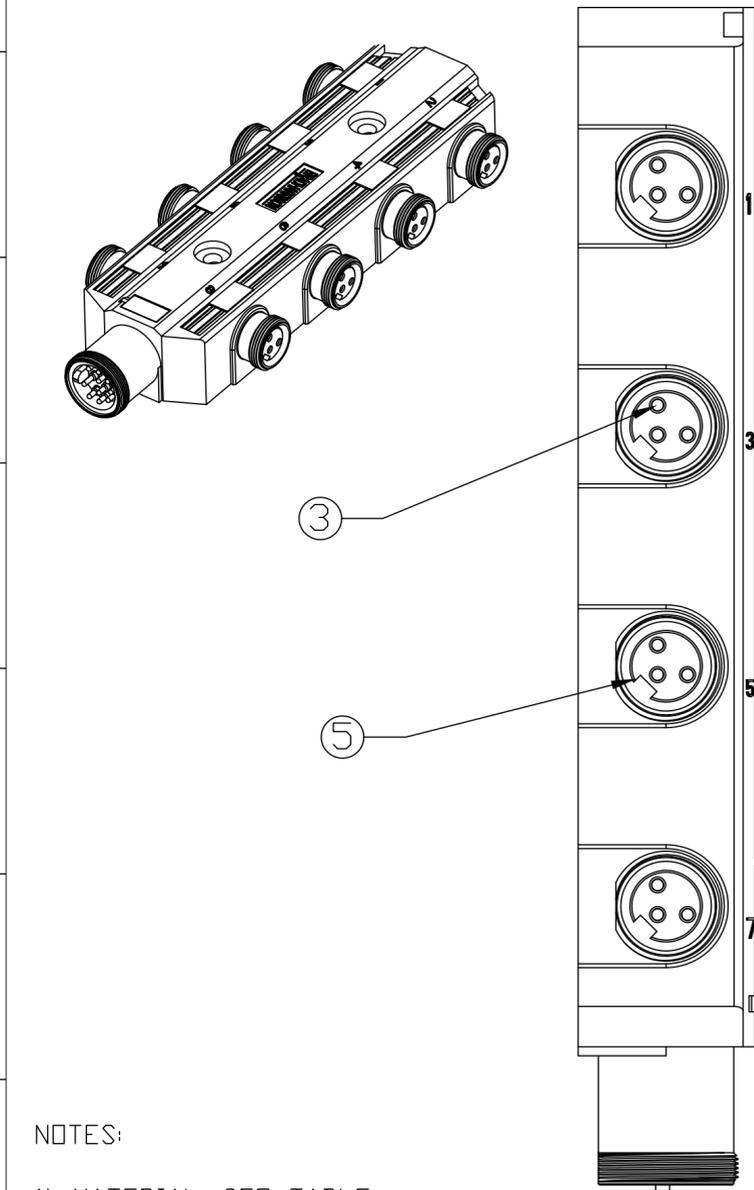
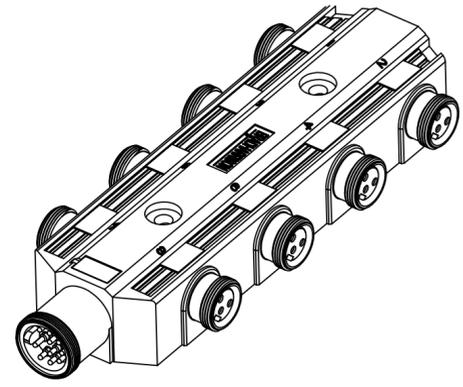


13	12	11	10	9	8	7	6	5	4	3	2	1
<b>MATERIAL NUMBER</b>	<b>ENGINEERING NUMBER</b>											
1300600026	410P801											

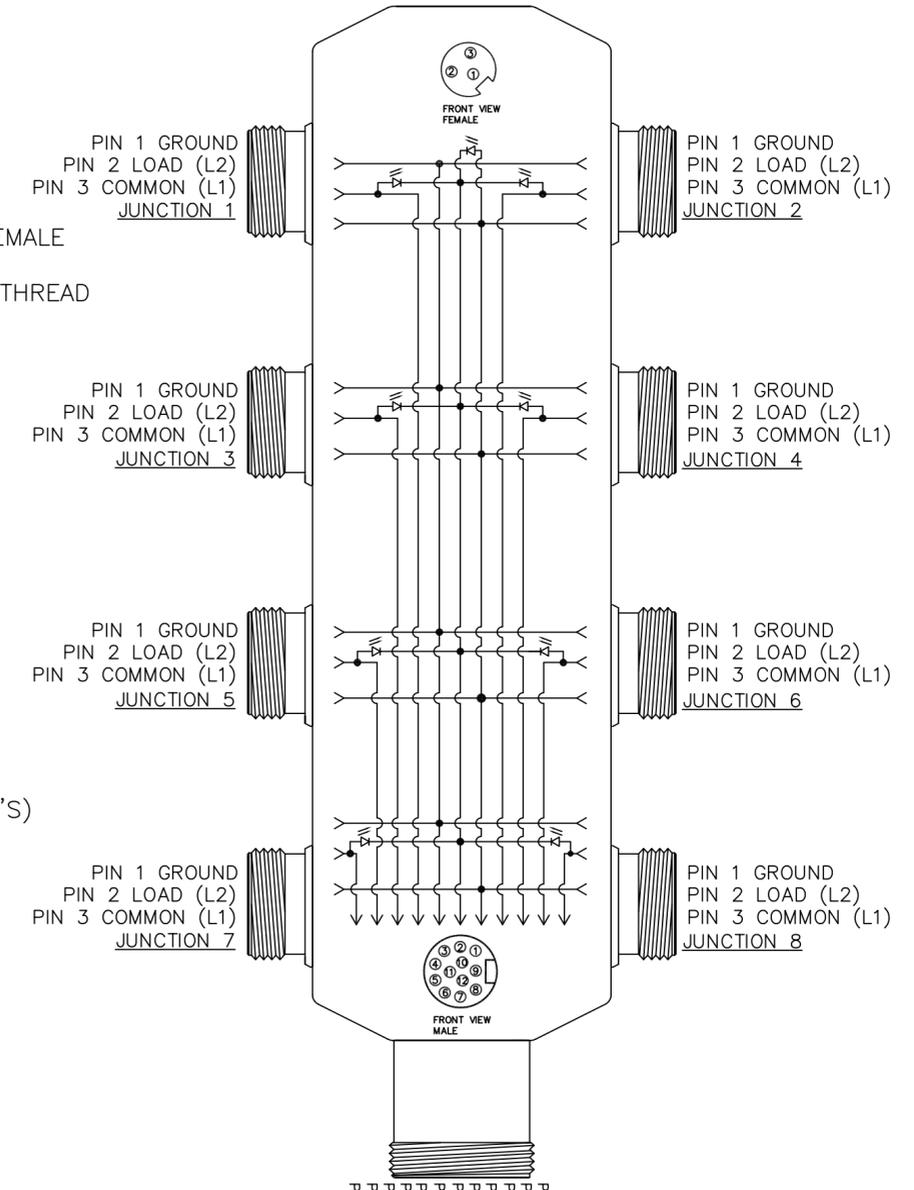


YELLOW LED 6  
OUTPUT INDICATION

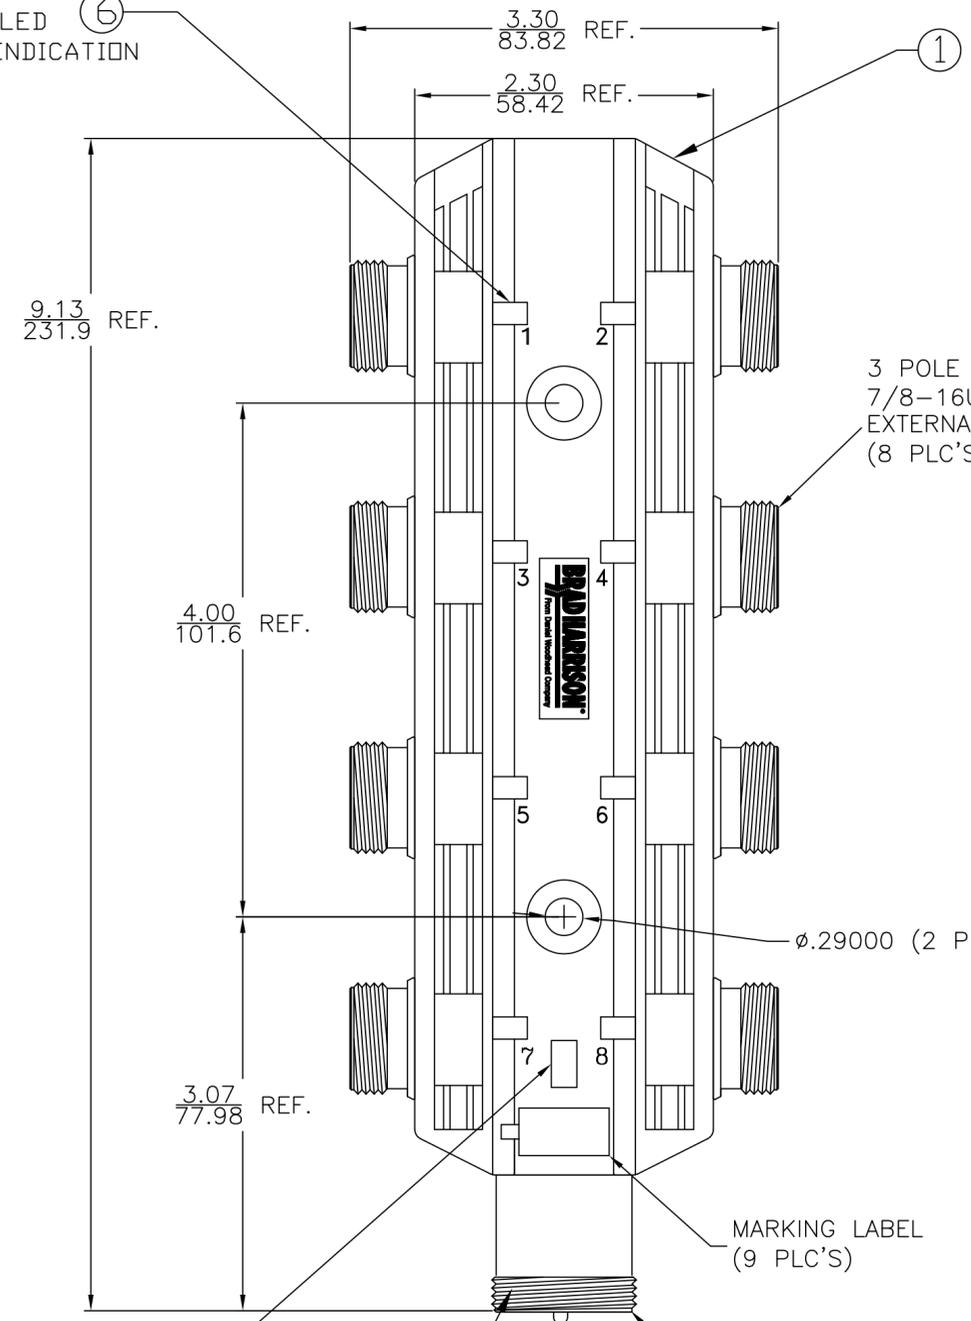

- NOTES:
- 1) MATERIAL: SEE TABLE
  - 2) FINISHES: SEE TABLE
  - 3) ELECTRICAL DATA:  
VOLTAGE: 600V AC/DC  
AMPERAGE: 7AMPS PER MPIS UNIT
  - 4) ENVIRONMENTAL:  
PROTECTION IP67  
OPERATING TEMPERATURE RANGE: -25 TO 90C
  - 5) LABEL IS MARKED WITH P/N, DATE CODE, AND SCHEMATIC
  - 6) CERTIFICATION:  
UL: UL RECOGNIZED  
CSA: CSA CERTIFIED

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
6	9	LENS	POLYCARBONATE	CLEAR
5	9	INSERT	PVC	YELLOW
4	10	PIN CONTACT	COPPER ALLOY	GOLD PLATED
3	24	SOCKET CONTACT	COPPER ALLOY	GOLD PLATED
2	9	RECEPTACLE SHELL	E-COATED ZINC ALLOY	BLACK
1	1	HOUSING	PBT	YELLOW

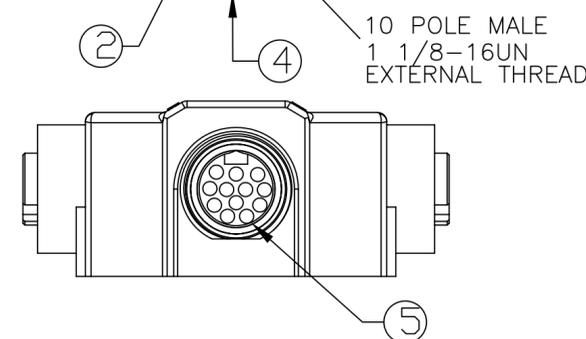

EC NO: WNA2010-0456 DRWN: TWOLDEGE 2010/01/22 CH'KD: BWOODMAN APPR: JFMURPHY 2010/01/29 RELEASE	DESCRIPTION REV	QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION		
		$\nabla = 0$ $C = 0$	4 PLACES	mm	INCH	DRAWN BY	DATE	1:1	INCH	TITLE <b>8PORT S. MOUNT MPIS LED          8PORT 3-POLE FEMALE W/          12P MALE HOME RUN CONN.</b>	
			3 PLACES	±---	±---	CHECKED BY	DATE	---	---		
			2 PLACES	±0.13	±0.010	JFMURPHY 2010/01/29		MOLEX INCORPORATED		SHEET NO. 1 OF 1	
	1 PLACE	±0.25	±0.020	APPROVED BY		MATERIAL NO. SEE CHART		DOCUMENT NO. SD-130060-007			
ANGULAR ±1/2° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE C THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								