
SMD 915MHz SAW Filter

AFS915S3

Moisture Sensitivity Level (MSL): 1

RoHS Compliant



FEATURES:

- Small package size
- Low insertion loss
- High attenuation

> APPLICATIONS:

- Mobil communication
- Remote Control

ELECTRICAL SPECIFICATIONS:


Maximum Ratings

Item	Value
Operating Temperature Range	-10° C to $+65^{\circ}$ C
Storage Temperature Range	-40° C to $+85^{\circ}$ C
DC Voltage	12V
Input Power Level	10dBm

Electrical Characteristics

Parameters		Minimum	Typical	Maximum	Units	Notes
Center Frequency (f _c)			915		MHz	
Usable Pass Band (BW)			26		MHz	
Insertion Loss (IL) (902MHz ~ 928MHz)			3.0	4.5	dB	
Ripple (902MHz ~ 928MHz)			1.5		dB	
Absolute Attenuation	DC ~ 800MHz	25	27		dB	
	800MHz ~ 880MHz	30	35			
	950MHz ~ 1080MHz	30	40			
	1080MHz ~ 2000MHz	20	25			
Input/Output Impedance (Nominal)			50		Ω	

TEST CIRCUIT:

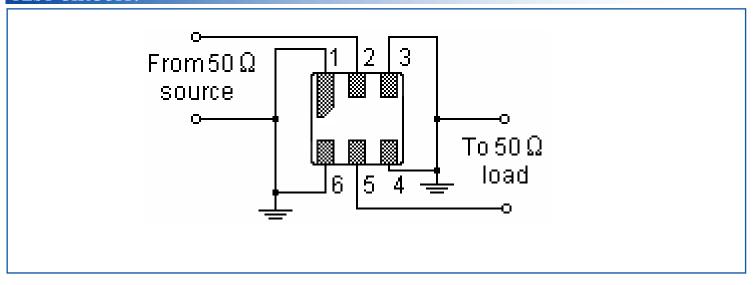







SMD 915MHz SAW Filter

AFS915S3







FREQUENCY CHARACTERISTICS

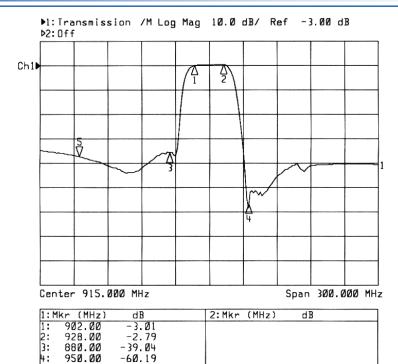

OUTLINE DIMENSION:

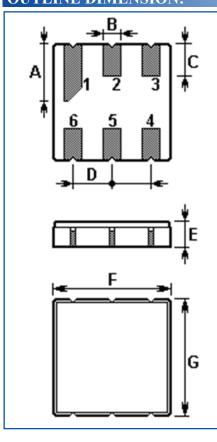

Recommended PCB Layout



Pin	Configuration
2	Input
5	Output
1,3,4,6	Ground

A	1.90±0.10		
В	0.64±0.10 (x6)		
C	1.00±0.10 (x5)		
D	1.27±0.10 (x4)		
E	1.35±0.15		
F	3.80±0.15		

Dimensions: mm

 3.80 ± 0.15

Unit: mm




800.00

G


SMD 915MHz SAW Filter

AFS915S3






REFLOW PROFILE:

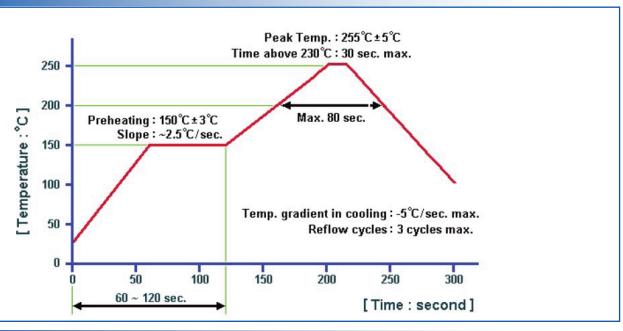

> TAPE & REEL:

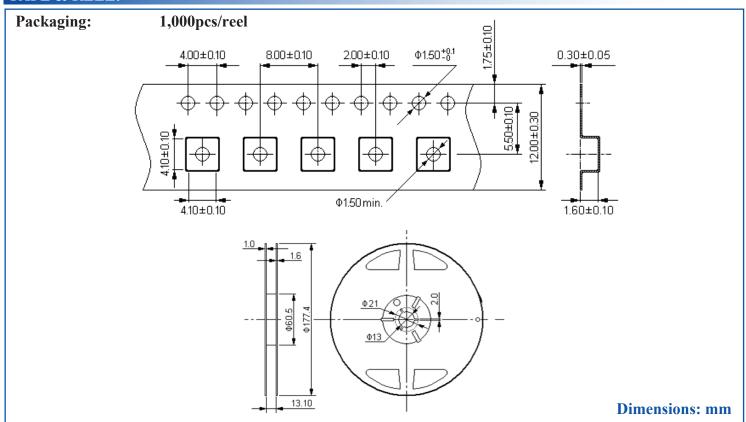

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.



