

#### **Features**

- · For Sensitive ESD Protection
- · Excellent Clamping Capability
- · Low Leakage
- · For Space Saving Application
- · Fast Response, Response Time Less than 1ns
- · Moisture Sensitivity Level 1
- Epoxy Meets UL 94 V-0 Flammability Rating
- Halogen Free. "Green" Device (Note 1)
- Lead Free Finish/RoHS Compliant ("P" Suffix Designates RoHS Compliant. See Ordering Information)

# **Maximum Ratings**

- Operating Junction Temperature Range: -55°C to +150°C
- Storage Temperature Range: -55°C to +150°C
- Thermal Resistance: 625°C/W Junction to Ambient

MCC Part Number	Device Marking
ESD3V3D5	ZE
ESD5V0D5	ZF
ESD7V0D5	ZH
ESD12VD5	ZM


IEC61000-4-2(ESD)	Air Contact	±30KV ±30KV
JESD22-A114-B(ESD)	Machine Human Body	±0.4KV ±16KV

Note: 1. Halogen free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.


# **Internal Structure**



# ESD Protection Device

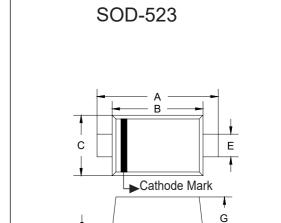


DIMENSIONS						
DIM	INCHES		M	M	NOTE	
DIIVI	MIN	MAX	MIN	MAX	INOTE	
Α	0.059	0.067	1.50	1.70		
В	0.043	0.051	1.10	1.30		
С	0.030	0.033	0.75	0.85		
E	0.010	0.014	0.25	0.35		
F	0.003	0.008	0.08	0.20		
G	0.020	0.026	0.50	0.65		

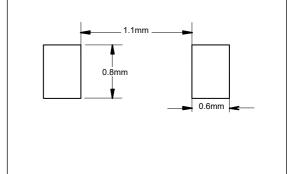



# **ELECTRICAL CHARACTERISTICS** (T<sub>A</sub> = 25°C unless otherwise noted)

Symbol	Parameter				
$V_{RWM}$	Peak Reverse Working Voltage				
I <sub>R</sub>	Reverse Leakage Current @ V <sub>RWM</sub>				
$V_{BR}$	Breakdown Voltage @ I <sub>⊺</sub>				
I <sub>T</sub>	Test Current				
I <sub>PP</sub>	Maximum Reverse Peak Pulse Current				
V <sub>C</sub>	Clamping Voltage @ I <sub>PP</sub>				
P <sub>PP</sub>	Peak Pulse Power				
CJ	Junction Capacitance				
I <sub>F</sub>	Forward Current				
V <sub>F</sub>	Forward Voltage @ I <sub>F</sub>				



# Electrical Characteristics @ 25°C (Unless Otherwise Specified)

#### ESD3V3D5

Parameter	Symbol	Conditions	Min.	Тур.	Max.	Units
Reverse Working Voltage	$V_{RWM}$				3.3	V
Reverse Breakdown Voltage	$V_{BR}$	I <sub>T</sub> = 1mA	5			V
Reverse Leakage Current	I <sub>R</sub>	V <sub>RWM</sub> =3.3V			0.08	μA
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 10mA			0.9	V
Peak Pulse Current	I <sub>PP</sub>	t <sub>P</sub> =8/20µs			16	Α
Clamping Voltage	V <sub>C</sub>	I <sub>PP</sub> =5A, t <sub>P</sub> =8/20μs			9.4	V
Clamping Voltage	V <sub>C</sub>	I <sub>PP</sub> =16A, t <sub>P</sub> =8/20μs			13	V
Peak Pulse Power	P <sub>PK</sub>	t <sub>P</sub> =8/20µs			220	W
Junction Capacitance	CJ	$V_R = 0V, f = 1MHz$		105		pF

## ESD5V0D5

Parameter	Symbol	Conditions	Min.	Тур.	Max.	Units
Reverse Working Voltage	$V_{RWM}$				5	V
Reverse Breakdown Voltage	$V_{BR}$	I <sub>T</sub> = 1mA	6.2			V
Reverse Leakage Current	I <sub>R</sub>	V <sub>RWM</sub> =5V			0.05	μA
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 10mA			0.9	V
Peak Pulse Current	I <sub>PP</sub>	t <sub>P</sub> =8/20µs			9.4	Α
Clamping Voltage	V <sub>C</sub>	I <sub>PP</sub> =5A, t <sub>P</sub> =8/20μs			11.6	V
Clamping Voltage	V <sub>C</sub>	I <sub>PP</sub> =9.4A, t <sub>P</sub> =8/20μs			18.6	V
Peak Pulse Power	P <sub>PK</sub>	t <sub>P</sub> =8/20µs			174	W
Junction Capacitance	CJ	$V_R = 0V, f = 1MHz$		80		pF



### Electrical Characteristics @ 25°C (Unless Otherwise Specified)

# ESD7V0D5

Parameter	Symbol	Conditions	Min.	Тур.	Max.	Units
Reverse Working Voltage	$V_{RWM}$				7	V
Reverse Breakdown Voltage	$V_{BR}$	$I_T = 1mA$	7.5			V
Reverse Leakage Current	I <sub>R</sub>	V <sub>RWM</sub> =7V			0.03	μA
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 10mA			0.9	V
Peak Pulse Current	I <sub>PP</sub>	t <sub>P</sub> =8/20µs			8.8	Α
Clamping Voltage	V <sub>C</sub>	I <sub>PP</sub> =5A, t <sub>P</sub> =8/20μs			13.5	V
Clamping Voltage	V <sub>C</sub>	$I_{PP}$ =8.8A, $t_{P}$ =8/20 $\mu$ s			22.7	V
Peak Pulse Power	P <sub>PK</sub>	t <sub>P</sub> =8/20µs			200	W
Junction Capacitance	CJ	$V_R = 0V, f = 1MHz$		65		pF

#### ESD12VD5


Parameter	Symbol	Conditions	Min.	Тур.	Max.	Units
Reverse Working Voltage	$V_{RWM}$				12	V
Reverse Breakdown Voltage	$V_{BR}$	I <sub>T</sub> = 1mA	14.1			V
Reverse Leakage Current	I <sub>R</sub>	V <sub>RWM</sub> =12V			0.02	μA
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 10mA			0.9	V
Peak Pulse Current	I <sub>PP</sub>	t <sub>P</sub> =8/20µs			9.6	Α
Clamping Voltage	V <sub>C</sub>	I <sub>PP</sub> =5A, t <sub>P</sub> =8/20μs			23	V
Clamping Voltage	V <sub>C</sub>	I <sub>PP</sub> =9.6A, t <sub>P</sub> =8/20μs			25	V
Peak Pulse Power	P <sub>PK</sub>	t <sub>P</sub> =8/20µs			240	W
Junction Capacitance	CJ	V <sub>R</sub> = 0V, f = 1MHz		55		pF

Rev.3-5-12012020 3/5 MCCSEMI.COM



#### **Curve Characteristics**

Fig. 1 - 8 X 20µs Pulse Waveform 100 Peak value I<sub>RSM</sub> @ 8µs Percent of Peak Pulse Current (%) 80 Pulse width(tp) is defined as that point where the peak 70 current decay=8µs 60 - Half value I<sub>RSM</sub> @ 20µs 50 30 20 10 0 20 40 60 Time (µs)

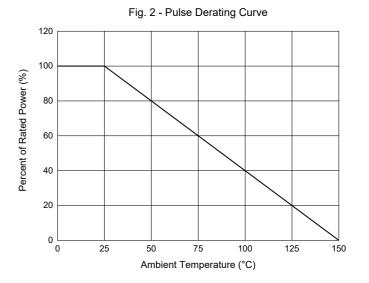

Rev.3-5-12012020 4/5 MCCSEMI.COM



## **Ordering Information**

Device	Packing
Part Number-TP	Tape&Reel: 8Kpcs/Reel

#### \*\*\*IMPORTANT NOTICE\*\*\*

**Micro Commercial Components Corp.** reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. **Micro Commercial Components Corp.** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp.** and all the companies whose products are represented on our website, harmless against all damages. **Micro Commercial Components Corp.** products are sold subject to the general terms and conditions of commercial sale, as published at

https://www.mccsemi.com/Home/TermsAndConditions.

#### \*\*\*LIFE SUPPORT\*\*\*

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

#### \*\*\*CUSTOMER AWARENESS\*\*\*

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

Rev.3-5-12012020 5/5 MCCSEMI.COM