

# CHO-SHIELD® 2040

## ELECTRICALLY CONDUCTIVE SILVER ACRYLIC EMI COATING



### Customer Value Proposition:

CHO-SHIELD® 2040 is an electrically conductive, one-component silver-filled acrylic coating that is specially formulated for application on plastics to provide premium EMI/RFI shielding performance. The coating's robust formulation can be applied in both high and low volume paint application processes.

CHO-SHIELD 2040 is ideal for use on electronic enclosures and assemblies. The coating's composition allows for simple, standard application using conventional equipment with minimal dry-time and handling.

CHO-SHIELD 2040 is ideal for use on medical electronic enclosures and assemblies which require high level, reliable EMI shielding performance and may benefit from silver's antimicrobial properties.

CHO-SHIELD 2040 conductive coating provides superior performance for a variety of applications, including:

- Superior EMI shielding (see shielding effectiveness curve Fig. 1)
- Anti-static protection
- Surface grounding



### Features and Benefits:

- One component
- Thermoplastic acrylic
- Silver flake filler
- Excellent-leveling, Wets and covers surfaces smoothly
- Easy to use. CHO-SHIELD 2040 is supplied at 40 weight % solids and can be thinned to a suitable spraying viscosity with MEK solvent. The coating can be applied with standard spray paint equipment, no expensive capital equipment required.
- Material dries at room temperature-no high temperature cure required, fast throughput. Good adhesion to a variety of plastics. Durable coating.
- Superior conductivity and EMI shielding. Silver coating has antimicrobial properties which make it a good material choice for hospital environments.
- Provides great coverage at thin dry film thickness which minimizes material costs and reduces paint cycle time.

### Contact Information:

Parker Hannifin Corporation  
Chomerics Division  
77 Dragon Court  
Woburn, MA 01801  
phone 781 935 4850  
fax 781 933 4318  
chomailbox@parker.com  
www.parker.com/chomerics



ENGINEERING YOUR SUCCESS.

# Application

## Recommended Preparation

1. Clean the substrate:  
The substrate surface should be clean, dry and free of oils, release agents, dirt and lint.
2. Mix the material:  
CHO-SHIELD 2040 is supplied at 40 weight% solids and should be thinned using MEK (Methyl Ethyl Ketone) to a suitable viscosity for application with your specific spray equipment.

Chomerics recommends the material be sprayed at approximately 30% solids (CHO-SHIELD 2040 may be sprayed at slightly higher or slightly lower weight % solids depending upon your equipment). Table 1 below shows the approximate weight of solvent which should be added to the CHO-SHIELD 2040 to achieve the corresponding weight % solids.

**Table 1: Thinning of CS 2040 for Application**

CS 2040 Weight % Solids	Weight of MEK per gallon of CS 2040 (grams)	Weight of MEK per quart of CS 2040 (grams)	Weight of MEK per 100 grams of CS 2040 (grams)
28	2119	530	50
30	1695	424	40
32	1324	331	31

When spraying CHO-SHIELD 2040 in a humid environment (R.H. > 50%), retard blushing by substituting 200 grams of n-butanol (also called n-butyl alcohol CAS# 71-36-3) for MEK per gallon of CHO-SHIELD 2040 before spraying.

3. After thinning with solvent, mix the material well by placing the can on a paint shaker for 3-4 minutes or mix by hand with a large spatula until all solids are in a homogeneous suspension. Check that no unmixed material remains on the bottom or the sides of the container.
4. Optional: Strain the material to reduce or eliminate the potential for clogging the spray nozzle. The paint can be strained through a coarse mesh (1000 micron) flat strainer into a pressure pot for spray. All metal fillers should be transferred, although a small amount of filler clusters might be collected in the strainer.

## Fluid Delivery System

Use a pressure pot (15 psi, 103 kPa, typical) with large diameter, paddle-type agitator at low mixing speed to keep the metal fillers in uniform suspension.

Conventional spray equipment such as HVLP (High Volume, Low Pressure) or DeVilbiss EGA 503 with propeller agitator pressure pots may be used for spray application with approximately 20-50 psi (138-345 kPa) atomizing air. Use lowest possible pressure.

Re-circulation of the paint from the mixing pot through the spray gun and back via a pump delivery system is recommended for greater filler uniformity.

For large volume applications, a robotic spray system with an HVLP spray gun should be used to minimize material loss due to overspray and maximize paint transfer efficiency. Siphon feed equipment can be used for small or prototype runs.

## Spray Gun and Pressure

Use a standard HVLP spray gun with approximately 20-40 psi (138-276 kPa) atomizing air.

A fluid nozzle with a minimum orifice diameter of 0.040 (1.016) is recommended.

To obtain maximum adhesion and conductivity, dry spraying should be avoided. Adjust the spray pressure to achieve a proper wet film when applying the conductive coating.

## Nominal Dry Film Thickness

A nominal dry film thickness of 0.001 inches (25 µm, 1 mil) is recommended to obtain 80 dB shielding effectiveness. However, a thinner or thicker coat may be acceptable depending on the shielding requirements of the device being protected.

Allow material to dry 10-20 minutes at room temperature between coats to avoid solvent entrapment.

## Drying Conditions

1. Dry at room temperature for 10-20 minutes.
2. Continue drying at 150°F ± 10°F (65°C ± 5.5°C) for 30 minutes for 0.001 inches (25 µm, 1 mil) thickness.

Dry longer if thicker film, shorter if thinner film, to achieve desired conductivity.

**Note:** Drying at room temperature for 24 hours will achieve similar performance.

## Clean-up


The spray system, including spray gun, mixing pot, and containers can be cleaned with MEK or Acetone (VOC exempt solvent). Masks can be power-washed with Challenge 485S barrier coat.

## Storage and Handling

CHO-SHIELD 2040 should be stored at 50°F to 86°F (10°C to 30°C) and has a 12 month shelf life from the date of manufacturing in the original sealed container. CHO-SHIELD 2040 is a flammable liquid. Please consult the material safety data sheet for proper handling procedures before use.

**Figure 1**

**CHO-SHIELD 2040 Typical Shield Effectiveness PER CHO-TM-TP11\***

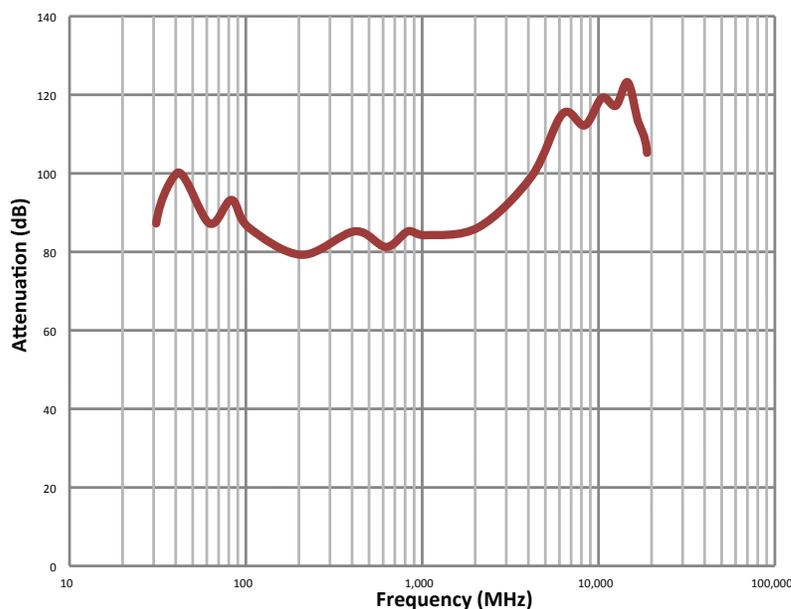

\* This test Method is available from Parker Chomerics.

## CHO-SHIELD 2040 - Product Information

Table 2 Typical Properties

CHO-SHIELD 2040		
Typical Properties	Typical Values	Test Method
Polymer	Acrylic	N/A
Filler	Silver	N/A
Mix Ratio (A:B by weight)	1-part	N/A
Color	Silver	N/A (Q)
Spray Viscosity	16 to 22 seconds	Zahn Cup Number 2 (Q)
Surface Resistance (max.) at 0.001 inches (25 µm, 1 mil)	<0.025 ohms / square	CEPS-0002 (Q/C)
Shielding Effectiveness (see Figure 1)	>80 dB	CHO-TM-TP11* (Q)
Recommended Dry Film Thickness	.001" (25 µm)	N/A
Wet Density	1.2	ASTM D792 (Q/C)
Average solids (weight- concentrated as supplied) Thin per application note 2	40%	Calculated (Q)
Continuous Use Temperature	-40 to 85°C (-40 to 185°F)	N/A (Q)
Pot Life	Unlimited	N/A (Q)
Drying Time- Room Temperature Tack Free	0.5 hr @ 21°C (70°F)	N/A
Drying Time- Room Temperature Full Dry	24 hrs @ 21°C (70°F)	N/A
Drying Time- Elevated Temperature Full Dry	0.25 hr @ 21°C (70°F), followed by 0.5 hr @ 66°C (150°F)	N/A
Shelf Life at 21°C (70°F), unopened, from Date of Manufacture	12 months	N/A (Q)
Calculated VOC	741 g/L	Calculated
Theoretical coverage at recommended dry film thickness	0.065 ft <sup>2</sup> /gram 0.0060 m <sup>2</sup> /gram 299 ft <sup>2</sup> /gallon	N/A

Notes: N/A – Not Applicable, [Q/C] – Qualification and Conformance Test, [Q] – Qualification Test

\* This test Method is available from Parker Chomerics.

### Ordering Information

Product	Weight (grams)	Packaging	Chomerics Part No.	Primer Included
CHO-SHIELD 2040	4238	1 gallon aluminum can	52-03-2040-0000	Not Required

The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalog and in any other materials provided from Parker or its subsidiaries or authorized distributors.

[www.chomerics.com](http://www.chomerics.com)  
[www.parker.com/chomerics](http://www.parker.com/chomerics)

CHOMERICS and CHO-SHIELD are registered trademarks of Parker Hannifin Corporation. © 2014

TB 1059 EN October 2015



ENGINEERING YOUR SUCCESS.